


Attenuators

Overview

SureCall's Attenuators work well in situations where you need to reduce the signal levels coming from or going to cell towers. Simply connect the attenuator between the booster and the connecting cable on the outdoor antenna side. Our attenuators are available in 5dB, 10 dB and 20dB models

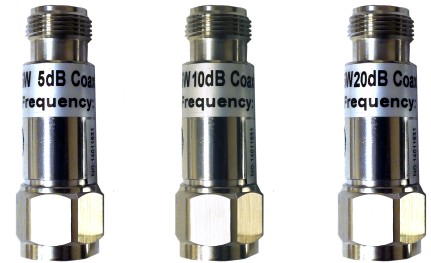

5dB attenuator 5W
Model # SC-ATNR-5

10dB attenuator 5W
Model # SC-ATNR-10

20dB attenuator 5W
Model # SC-ATNR-20

Contents

- Commercial Grade
- Meet International Standards

Specification

	5 dB	10 dB	20 dB
Power Consumption	5W	5W	5W
Attenuation Accuracy	±0.6 dB	±0.8 dB	±0.8 dB
Dimensions (LxWxH)	20 x 58 mm	20 x 58 mm	20 x 58 mm
Weight	2.26 oz	2.26 oz	2.26 oz
VSWR	≤1.2	≤1.2	≤1.2
Impedance	50 Ω	50 Ω	50 Ω
Frequency Range	DC - 3GHz	DC - 3GHz	DC - 3GHz
Operating Temperature	-55° - 257°	-55° - 257°	-55° - 257°
Connector	NJ-NK	NJ-NK	NJ-NK